



HIKVISION[®]



유통 제품 카탈로그

**HOT-SELLING
PRODUCTS**

하이크비전 소개

하이크비전(Hikvision)은 최첨단 기술을 통해 다양한 산업에 서비스를 제공하기 위해 최선을 다하고 있습니다. 기계인식, 인공지능, 빅데이터 등을 통해 AIoT의 미래를 선도합니다.

R&D 투자

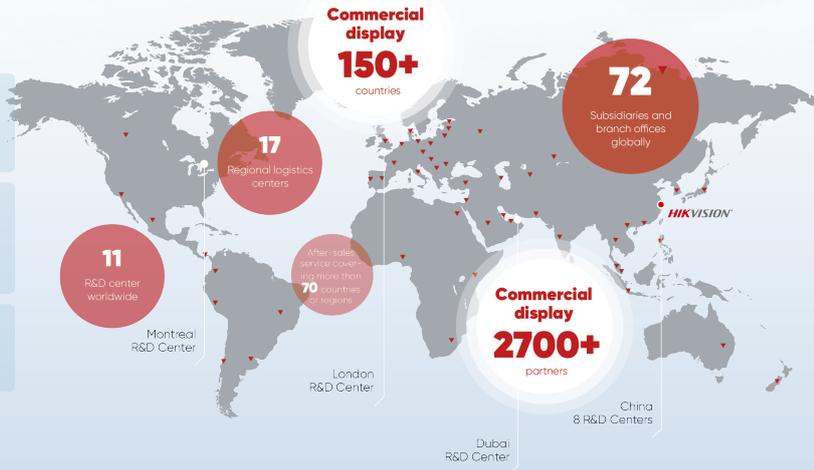

다양한 제품 & 솔루션 제공

다음과 같은 선도적인 기술을 사용하여 약 **30,000**개의 하드웨어 제품과 **200**개 이상의 소프트웨어 제품을 개발합니다:



더 스마트한 미래를 보장

보안 혁신의 최전선에서 하이크비전은 모든 사용자를 위해 더 안전할 뿐만 아니라 더 지능적인 미래를 위한 기반을 마련하는 것을 목표로 합니다.

통합 기술의 발전

하이크비전은 단순한 시야에서 다차원 인식으로 확장하고 보안 강화를 위한 AI 분석을 통해 전체 제품 범위를 강화하고 있습니다. 하이크비전은 오디오 및 비디오 연결, 멀티 렌즈 시너지와 같은 최첨단 기술을 원활하게 통합함으로써 지능형 보안의 새로운 표준을 만듭니다.

융합된 애플리케이션을 통한 혁신

하이크비전은 단독 제품에서 통합 시스템으로 전환하여 Hik-Partner Pro 및 Hik-Connect 플랫폼을 통해 원스톱 솔루션을 제공합니다. 이러한 솔루션은 중소 규모 사례의 원격 관리 및 유지 관리를 간소화하여 주거지, 사무실 및 리테일 공간에 효율적인 서비스를 제공합니다.

Contents

01 하이라이트

- 01 컬러뷰 | ColorVu
- 01 아큐센스 | AcuSense
- 01 디렉스 6MP
- 01 듀얼 감지
- 01 스마트 하이브리드 라이트

- 01 멀티 렌즈 시너지
- 01 파노라마 카메라
- 01 텐덤뷰 | TandemVu PTZ 카메라

02 Easy-to-use

- 02 PT
- 02 자동 설정
- 02 클라우드 기반 관리
- 02 OTA

02 오디오 및 비디오 통합

- 02 양방향 오디오
- 02 라이브 가드
- 02 비디오 연동 가능한 스마트 오디오
- 02 4 와이어 HDTVI 인터콤

03 제품 쇼케이스

- 03 네트워크 카메라
- 07 네트워크 비디오 녹화기
- 09 Turbo HD 카메라
- 10 DVR
- 11 네트워크 & 전송
- 12 비디오 인터콤

- 13 출입 통제
- 13 출입구 관리
- 14 침입 알람
- 14 오디오
- 15 디스플레이
- 15 악세서리

16 소프트웨어

- 16 Hik-Partner Pro
- 16 Hik-Connect

16 SMB 솔루션

- 16 주거 솔루션
- 17 매장 솔루션
- 17 오피스 솔루션

18 친환경 | TOWARDS A GREENER FOOTPRINT

하이라이트


컬러뷰 | ColorVu

초저도도 환경에서도 뛰어난 컬러 이미지를 보장하는 첨단 센서 및 F1.0 슈퍼 조리개를 탑재 하였습니다. 새롭게 등장한 "ColorVu + X"는 기타 하이키비전의 첨단 기술("X")과 결합되어 더욱 놀라운 가능성을 가져다 줍니다.



스마트 하이브리드 라이트

하나의 카메라에 3가지 보조 조명 모드 탑재: 24시간 컬러, IR(B&W), 또는 스마트 모드 지원합니다. 사람과 차량을 다른 물체와 구별하고 이벤트 트리거 시 색상 이미지를 선사함으로써 중요한 세부 정보를 캡처합니다.

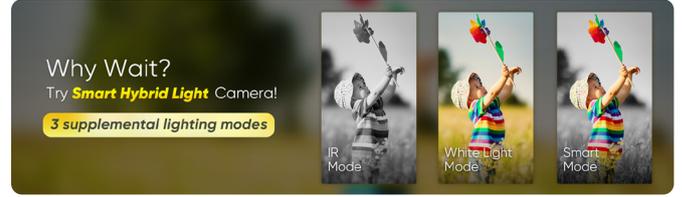

아큐센스 | AcuSense

딥러닝 알고리즘을 기반으로 한 AcuSense 기술에는 사람/차량 탐지에 주목하는 Motion Detection 2.0과 비디오 콘텐츠 분석(VCA)이 포함되어 있어 이벤트가 발생 시 트리거 됩니다. 또한 빠른 이벤트 후 검색을 위한 AcuSearch가 포함되어 있어 클릭 한 번으로 사용자가 특정 관심 대상을 정확히 파악할 수 있습니다.



멀티 렌즈 시너지

파노라마 카메라

듀얼 렌즈가 장착된 하나의 보안 카메라는 이미지 융합 알고리즘을 결합하여 180도 수평 시야를 스티칭 및 선사합니다.



디렉스 6MP

더 높은 해상도뿐만 아니라 업그레이드된 하드웨어 및 소프트웨어로 더 다양한 6MP의 비용 효율적인 카메라를 사용할 수 있습니다.




듀얼 감지

정확한 알람을 위해 PIR과 레이더를 결합한 이중 감지기입니다.



탠덤뷰 | TandemVu PTZ 카메라

하나의 카메라가 큰 시야와 작은 세부 정보를 함께 제공하며, 즉각적인 목표 추적을 위한 스마트 연동 기능도 제공합니다.

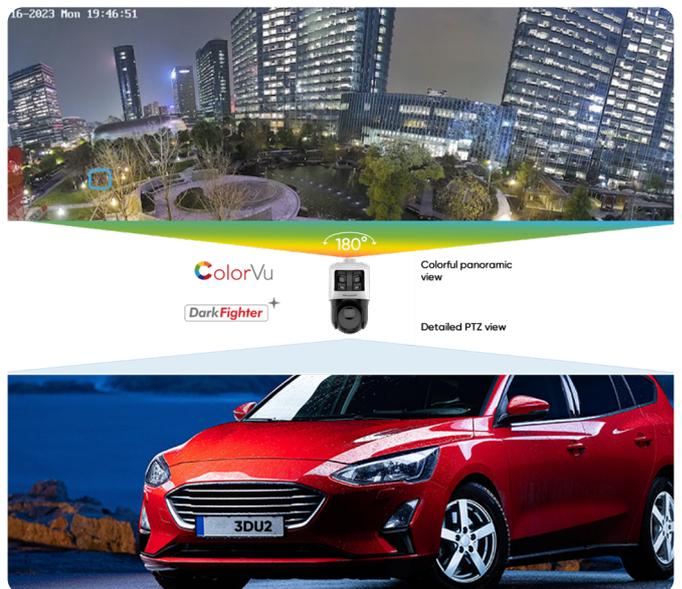

하이라이트

Easy-to-use

쉬운 설치

PT


팬과 틸트, Hik-Connect를 통해 어떤 각도로든 쉽게 원격 조정 가능하고 설치가 용이한 일체형 브라켓을 탑재 하였습니다.



쉬운 활성화

자동 설정

자동 활성화와 프로세스는 직관적인 결과 전시로 자동 활성화를 가능하게 합니다.

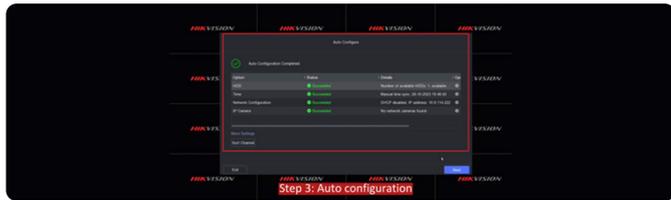

쉬운 관리

클라우드 기반 관리

HPP(Hik-Partner Pro) 앱을 통한 클라우드 관리는 설정을 간소화하고 네트워킹 및 보안 관리를 통합하며 스마트 관리 스위치에 대한 원격 문제 해결을 용이하게 합니다.



쉬운 업그레이드

OTA

NVR 및 DVR용 EUI의 OTA(Over-the-air) 업그레이드를 통해 사용자는 여러 플랫폼에서 최신 시스템 업그레이드를 진행 할 수 있습니다.



오디오 및 비디오 통합

양방향 오디오

마이크와 스피커가 내장된 장비로 양방향 오디오를 실현하여 실시간 소통이 가능하여 한계를 돌파합니다.




라이브 가드

실시간 감박이는 조명 및 오디오 경고를 통해 사전 보호 및 경고 작용을 합니다.



비디오 연동 가능한 스마트 오디오

동기화된 오디오 & 비디오 시스템은 보안을 강화하고 강력하고 적시적으로 위협에서 신속하게 대응할 수 있도록 합니다.

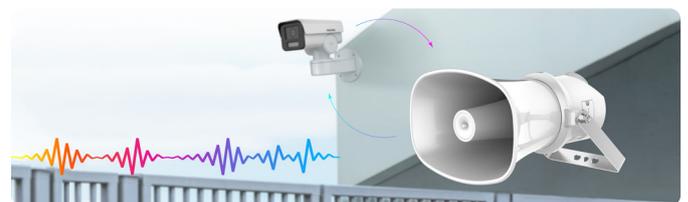

4 와이어 HDTVI 인터콤

양방향 오디오 TVI 기술로 구동되는 Hikvision의 4와이어 HD 인터콤 솔루션은 4와이어 케이블을 통해 720p 화질을 제공하여 주거 보안과 편의성을 강화합니다.



제품 쇼케이스

네트워크 카메라

Pro Series Smart Hybrid Light Cameras with ColorVu



DS-2CD2047G2H-LIU/SL

- 4 MP resolution
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Eco-friendly packaging
- Strobe light and audio alarm, Built-in two-way audio



DS-2CD2147G2H-LISU

- 4 MP resolution
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Eco-friendly packaging
- 3-axis adjustment



HOT

DS-2CD2347G2H-LISU/SL

- 4 MP resolution
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Eco-friendly packaging
- Strobe light and audio alarm, Built-in two-way audio



HOT

DS-2CD2T47G2H-LISU/SL

- 4 MP resolution
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Eco-friendly packaging
- Strobe light and audio alarm, Built-in two-way audio



DS-2CD2087G2H-LIU/SL

- 4K resolution
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Eco-friendly packaging
- Strobe light and audio alarm, Built-in two-way audio



DS-2CD2187G2H-LISU

- 4K resolution
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Eco-friendly packaging
- 3-axis adjustment



HOT

DS-2CD2387G2H-LISU/SL

- 4K resolution
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Eco-friendly packaging
- Strobe light and audio alarm, Built-in two-way audio



HOT

DS-2CD2T87G2H-LISU/SL

- 4K resolution
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Eco-friendly packaging
- Strobe light and audio alarm, Built-in two-way audio



DS-2CD2647G2HT-LIZS

- 4 MP resolution, varifocal
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Eco-friendly packaging
- IP67 and IK10



DS-2CD2787G2HT-LIZS

- 4K resolution, varifocal
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Eco-friendly packaging
- 3-axis adjustment
- IP67 and IK10



DS-2CD2687G2HT-LIZS

- 4K resolution, varifocal
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Eco-friendly packaging
- IP67 and IK10



DS-2CD2747G2HT-LIZS

- 4 MP resolution, varifocal
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Eco-friendly packaging
- 3-axis adjustment
- IP67 and IK10

네트워크 카메라

Pro Series Smart Hybrid Light Cameras

Smart Hybrid Light

NEW



DS-2CD204362-LI2U

- 4 MP resolution
- Smart Hybrid Light
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Built-in dual microphones



DS-2CD214362-LI2U

- 4 MP resolution
- Smart Hybrid Light
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Built-in dual microphones
- 3-axis adjustment



DS-2CD234362-LI2U

- 4 MP resolution
- Smart Hybrid Light
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Built-in dual microphones



DS-2CD254362-LI2U

- 4 MP resolution
- Smart Hybrid Light
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Built-in dual microphones



DS-2CD2T4362-LI2U

- 4 MP resolution
- Smart Hybrid Light
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Built-in dual microphones



DS-2CD256362-LI2U

- 6 MP high performance resolution
- Smart Hybrid Light
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Built-in dual microphones



DS-2CD2T6362-LI2U

- 6 MP high performance resolution
- Smart Hybrid Light
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Built-in dual microphones



DS-2CD208362-LI2U

- 4K ultra-high resolution
- Smart Hybrid Light
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Built-in dual microphones



DS-2CD218362-LI2U

- 4K ultra-high resolution
- Smart Hybrid Light
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Built-in dual microphones
- 3-axis adjustment



DS-2CD238362-LI2U

- 4K ultra-high resolution
- Smart Hybrid Light
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Built-in dual microphones



DS-2CD258362-LI2U

- 4K ultra-high resolution
- Smart Hybrid Light
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Built-in dual microphones



DS-2CD2T8362-LI2U

- 4K ultra-high resolution
- Smart Hybrid Light
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Built-in dual microphones



DS-2CD264362-LI2U

- 4 MP resolution, vari-focal
- Smart Hybrid Light
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Built-in dual microphones



DS-2CD266362-LI2U

- 6 MP high performance resolution, varifocal
- Smart Hybrid Light
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Built-in dual microphones



DS-2CD268362-LI2U

- 4K ultra-high resolution, varifocal
- Smart Hybrid Light
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Built-in dual microphones



DS-2CD274362-LI2U

- 4 MP resolution, varifocal
- Smart Hybrid Light
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Built-in dual microphones
- 3-axis adjustment



DS-2CD276362-LI2U

- 6 MP high performance resolution, varifocal
- Smart Hybrid Light
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Built-in dual microphones
- 3-axis adjustment



DS-2CD278362-LI2U

- 4K ultra-high resolution, varifocal
- Smart Hybrid Light
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Built-in dual microphones
- 3-axis adjustment

네트워크 카메라



Value Series Smart Hybrid Light Cameras with ColorVu



DS-2CD1027G2H-LIU

- 1080P resolution
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- Motion Detection 2.0



DS-2CD1127G2H-LIU

- 1080P resolution
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- Motion Detection 2.0
- 3-axis adjustment
- IP67 and IK08



DS-2CD1327G2H-LIU

- 1080P resolution
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- Motion Detection 2.0



DS-2CD1047G2H-LIU

- 4 MP resolution
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- Motion Detection 2.0



DS-2CD1147G2H-LIU

- 4 MP resolution
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- Motion Detection 2.0
- 3-axis adjustment
- IP67 and IK08



DS-2CD1347G2H-LIU

- 4 MP resolution
- Smart Hybrid Light
- ColorVu, F1.0 Super Confocal Lens
- Motion Detection 2.0

Value Series Smart Hybrid Light Cameras



DS-2CD1023G2-LIU

- 1080P resolution
- Smart Hybrid Light
- Motion Detection 2.0
- Built-in microphone



DS-2CD1123G2-LIU

- 1080P resolution
- Smart Hybrid Light
- Motion Detection 2.0
- 3-axis adjustment
- IP67 and IK08



DS-2CD1323G2-LIU

- 1080P resolution
- Smart Hybrid Light
- Motion Detection 2.0
- Built-in microphone



DS-2CD1043G2-LIU

- 4 MP resolution
- Smart Hybrid Light
- Motion Detection 2.0
- Built-in microphone



DS-2CD1143G2-LIU

- 4 MP resolution
- Smart Hybrid Light
- Motion Detection 2.0
- 3-axis adjustment
- IP67 and IK08



DS-2CD1343G2-LIUF/SL

- 4 MP resolution
- Smart Hybrid Light
- Motion Detection 2.0
- Built-in microphone



DS-2CD1623G2-LIZSU

- 2 MP resolution, varifocal
- Smart Hybrid Light
- Motion Detection 2.0
- Strobe light and audio alarm, Built-in wo-way audio



DS-2CD1643G2-LIZSU

- 4 MP resolution, varifocal
- Smart Hybrid Light
- Motion Detection 2.0
- Strobe light and audio alarm, Built-in two-way audio



DS-2CD1723G2-LIZSU

- 2 MP resolution, varifocal
- Smart Hybrid Light
- Motion Detection 2.0
- 3-axis adjustment
- IP67 and IK08



DS-2CD1743G2-LIZSU

- 4 MP resolution, varifocal
- Smart Hybrid Light
- Motion Detection 2.0
- 3-axis adjustment
- IP67 and IK08

네트워크 카메라

Pro Series Dual-Lens Stitched Cameras with ColorVu



DS-2CD236762P-LSU/SL

- 3 MP+3 MP resolution
- 180° seamless stitching
- ColorVu, F1.0 super aperture
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Strobe light and audio alarm



DS-2CD238762P-LSU/SL

- 4 MP+4 MP resolution
- 180° seamless stitching
- ColorVu, F1.0 super aperture
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Strobe light and audio alarm



DS-2CD2T6762P-LSU/SL

- 3 MP+3 MP resolution
- 180° seamless stitching
- ColorVu, F1.0 super aperture
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Strobe light and audio alarm



DS-2CD2T8762P-LSU/SL

- 4 MP+4 MP resolution
- 180° seamless stitching
- ColorVu, F1.0 super aperture
- AcuSense: Motion Detection 2.0 & Perimeter Protection
- Strobe light and audio alarm

Pro Series Fisheye Cameras



DS-2CD295560-ISU

- 5 MP high resolution
- 180° fisheye view
- Audio and alarm interface
- AcuSense: Motion Detection 2.0 & Perimeter Protection

Solar-powered Network Cameras



DS-2XS2T41G1-ID/4G/C05S07

- 4 MP@15fps, 4 mm/6 mm lens
- PIR + Radar to reduce false alarms
- Built-in two-way audio
- Support 4G communication
- Solar panel: 6.5W, Battery: 51.46WH



DS-2XS2T47G1-LDH/4G/C18S40

- 4 MP@15fps, 4 mm/6 mm lens
- ColorVu with 24/7 colorful imaging
- Built-in two-way audio
- Support 4G communication
- Solar panel: 40W, Battery: 180WH



DS-2XS3Q47G1-LD(H)/4G/C18S40
DS-2XS3Q47G1-LDW(H)/C18S40

- 4 MP@15fps
- Wi-Fi: 2.8 mm/4 mm/6 mm lens, 4G: 4 mm/6 mm lens
- Built-in two-way audio
- Pan: 0° to 340°, Tilt: -5° to 105°
- ColorVu with 24/7 colorful imaging
- Built-in two-way audio
- Support 4G/Wi-Fi communication
- Solar panel: 40W, Battery: 180WH

PT Network Camera



DS-2DE3A400BW-DE

- 4 MP@25/30 fps, 2.8 mm/4 mm lens
- Two-way audio
- Pan: 0° to 350°, tilt: 0° to 90°
- 30 m white light
- IP66



DS-2DE2C400MWG-E

- 4 MP@20 fps, 2.8 mm/4 mm lens
- Two-way audio
- Pan: 0° to 345°, tilt: 0° to 80°
- Smart Hybrid Light
- 30 m white light and 30 m IR
- IP66



DS-2DE2A404IW-DE3

- 4 MP@25/30 fps, 2.8 - 12 mm lens
- Two-way audio
- Pan: 0° to 355°, tilt: 0° to 90°
- 20 m IR
- IP66, IK10



DS-2DE2C400SCG-E

- 4 MP@25/30 fps, 2.8 mm/4 mm lens
- Two-way audio
- Pan: 0° to 340°, tilt: -5° to 105°
- 30 m white light
- IP66

PTZ Network Camera



DS-2DE4425IW-DE

- 1/2.8" 4 MP CMOS, 25x optical zoom
- 4 MP@25/30 fps
- AcuSense
- Pan: 360° endless, tilt: -15° to 90°
- 100 m IR
- IP66



DS-2DE4A425IWG-E

- 1/2.8" 4 MP CMOS, 25x optical zoom
- 4 MP@50/60 fps
- AcuSense, Auto tracking 2.0
- Pan: 360° endless, tilt: -5° to 90°
- 50 m IR
- IP66



DS-2SE4C425MWG-E(14F0)

- Panoramic: 1/3" 4 MP CMOS, 2.8 mm
- PTZ: 1/2.8" 4 MP CMOS, 25x optical zoom
- 4 MP@25/30 fps
- AcuSense, Smart linkage
- Pan: 360° endless, tilt: -15° to 90°
- 30 m white light and 100 m IR
- IP66



DS-2DE7A412MCG-EB

- 1/1.8" 4 MP CMOS, 12x optical zoom
- 4 MP@25/30 fps
- AcuSense, Auto tracking 2.0, Live Guard
- Pan: 360° endless, tilt: -15° to 90°
- 100 m white light or 150 m IR
- IP66

네트워크 비디오 녹화기

K series with AcuSense

HOT



DS-7604NXI-K1(/4P)

- 4-ch IP video input; /P: PoE
- Up to 1-ch@12 MP or 2-ch@8 MP or 4-ch@4 MP or 8-ch@1080p decoding capacity
- Up to 4-ch Motion Detection 2.0
- Up to 1-ch perimeter protection
- 1 SATA interface, up to 10 TB for each HDD
- Up to 40 Mbps incoming bandwidth



DS-7608NXI-K1(/8P)

- 8-ch IP video input; /P: PoE
- Up to 1-ch@12 MP or 2-ch@8 MP or 4-ch@4 MP or 8-ch@1080p decoding capacity
- Up to 8-ch Motion Detection 2.0
- Up to 1-ch perimeter protection
- 1 SATA interface, up to 10 TB for each HDD
- Up to 80 Mbps incoming bandwidth



DS-7608NXI-K2(/8P)

- 8-ch IP video input; /P: PoE
- Up to 2-ch@12 MP or 3-ch@8 MP or 6-ch@4 MP or 12-ch@1080p decoding capacity
- Up to 8-ch Motion Detection 2.0
- Up to 2-ch perimeter protection
- 2 SATA interfaces, up to 10 TB for each HDD
- Up to 80 Mbps incoming bandwidth



DS-7616NXI-K2(/16P)

- 16-ch IP video input; /P: PoE
- Up to 2-ch@12 MP or 3-ch@8 MP or 6-ch@4 MP or 12-ch@1080p decoding capacity
- Up to 16-ch Motion Detection 2.0
- Up to 2-ch perimeter protection
- 2 SATA interfaces, up to 10 TB for each HDD
- Up to 160 Mbps incoming bandwidth



HIKVISION
海康威视

F

H

Turbo HD 카메라

Smart Hybrid Light Cameras with ColorVu



DS-2CE10DF0T-LF

- 2 MP, 2.8 mm, 3.6 mm fixed focal lens
- Smart Hybrid light with ColorVu
- Super Confocal F1.0 Lens
- 4 in 1(TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)



DS-2CE12DF0T-LF

- 2 MP, 2.8 mm, 3.6 mm fixed focal lens
- Smart Hybrid light with ColorVu
- Super Confocal F1.0 Lens
- 4 in 1(TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)



DS-2CE70DF0T-LMF

- 2 MP, 2.8 mm, 3.6 mm fixed focal lens
- Smart Hybrid light with ColorVu
- Super Confocal F1.0 Lens
- 4 in 1(TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)



DS-2CE10KF0T-LF

- 3K(5MP 16:9), 2.8 mm, 3.6 mm fixed focal lens
- Smart Hybrid light with ColorVu
- Super Confocal F1.0 Lens
- 4 in 1(TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)



DS-2CE12KF0T-LF

- 3K(5MP 16:9), 2.8 mm, 3.6 mm fixed focal lens
- Smart Hybrid light with ColorVu
- Super Confocal F1.0 Lens
- 4 in 1(TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)



DS-2CE70KF0T-LMF

- 3K(5MP 16:9), 2.8 mm, 3.6 mm fixed focal lens
- Smart Hybrid light with ColorVu
- Super Confocal F1.0 Lens
- 4 in 1(TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)

Smart Hybrid Light Cameras



DS-2CE16D0T-LPF

- 2MP, 2.8 mm, 3.6 mm fixed focal lens
- Smart Hybrid light
- 4 in 1(TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)



DS-2CE76D0T-LPF

- 2 MP, 2.8 mm, 3.6 mm fixed focal lens
- Smart Hybrid light
- 4 in 1(TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)



DS-2CE16K0T-LPF

- 3K(5MP 16:9), 2.8 mm, 3.6 mm fixed focal lens
- Smart Hybrid light
- 4 in 1(TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)



DS-2CE76K0T-LPF

- 3K(5MP 16:9), 2.8 mm, 3.6 mm fixed focal lens
- Smart Hybrid light
- 4 in 1(TVI/AHD/CVI/CVBS)
- Water and dust resistant (IP67)

DVR

Pro series with AcuSense



iDS-7204HQHI-M1/XT(STD)
iDS-7204HQHI-M1/XT(STD)/4A+4/1ALM

- 4 channels and 1 HDD 1U AcuSense DVR
- Support 1-ch Facial Recognition or 2-ch advanced model Perimeter Protection based on Deep Learning algorithm
- Support HDTVI Two-Way Audio technology
- Efficient H.265 pro+ compression technology
- Encoding ability up to 3K/5MP Lite @ 12 fps
- 5 signals input adaptively (HDTVI/AHD/CVI/CVBS/IP)
- Up to 6 network cameras can be connected
- Support All channels Motion Detection technology



iDS-7204HUHI-M1/X(STD)
iDS-7204HUHI-M1/X(STD)/4A+4/1ALM

- 4 channels and 1 HDD 1U AcuSense DVR
- Support 2-ch Facial Recognition or 4-ch advanced model Perimeter Protection based on Deep Learning algorithm
- Efficient H.265 pro+ compression technology
- Encoding ability up to 4K @ 8fps(1-ch) 3K/5MP @12fps
- Up to 8 network cameras can be connected
- 5 signals input adaptively (HDTVI/AHD/CVI/CVBS/IP)
- Support All channels Motion Detection technology



iDS-7204HUHI-M2/X(STD)
iDS-7204HUHI-M2/X(STD)/4A+4/1ALM

- 4 channels and 2 HDD 1U AcuSense DVR
- Support 2-ch Facial Recognition or 4-ch advanced model Perimeter Protection based on Deep Learning algorithm
- Efficient H.265 pro+ compression technology
- Encoding ability up to 4K @ 8fps(1-ch) 3K/5MP @12fps
- Up to 8 network cameras can be connected
- 5 signals input adaptively (HDTVI/AHD/CVI/CVBS/IP)
- Support All channels Motion Detection technology



iDS-7208HQHI-M1/XT(STD)
iDS-7208HQHI-M1/XT(STD)/4A+8/4ALM

- 8 channels and 1 HDD 1U AcuSense DVR
- Supports 2-ch Facial Recognition or 4-ch advanced model Perimeter Protection based on Deep Learning algorithm
- Support HDTVI Two-Way Audio technology
- Efficient H.265 pro+ compression technology
- Encoding ability up to 3K/5M Lite @ 12 fps
- 5 signals input adaptively (HDTVI/AHD/CVI/CVBS/IP)
- Up to 12 network cameras can be connected
- Support All channels Motion Detection technology



iDS-7208HQHI-M2/X(STD)
iDS-7208HQHI-M2/X(STD)/8A+8/4ALM

- 8 channels and 2 HDD 1U AcuSense DVR
- Supports 2-ch Facial Recognition or 4-ch advanced model Perimeter Protection based on Deep Learning algorithm
- Support HDTVI Two-Way Audio technology
- Efficient H.265 pro+ compression technology
- Encoding ability up to 3K/5M Lite @ 12 fps
- 5 signals input adaptively (HDTVI/AHD/CVI/CVBS/IP)
- Up to 12 network cameras can be connected
- Support All channels Motion Detection technology



iDS-7208HUHI-M1/X(STD)
iDS-7208HUHI-M1/X(STD)/4A+8/4ALM

- 8 channels and 1 HDD 1U AcuSense DVR
- Support 4-ch Facial Recognition or 8-ch advanced model Perimeter Protection based on Deep Learning algorithm
- Efficient H.265 pro+ compression technology
- Encoding ability up to 4K @ 8fps; 3K/5MP @12fps
- Up to 16 channels IP camera inputs, each channel up to 8MP
- Up to 24*1080P@30fps decoding ability
- 5 signals input adaptively (HDTVI/AHD/CVI/CVBS/IP)
- Support All channels Motion Detection technology



iDS-7208HUHI-M2/X(STD)
iDS-7208HUHI-M2/X(STD)/8A+8/4ALM

- 8 channels and 2 HDD 1U AcuSense DVR
- Support 4-ch Facial Recognition or 8-ch advanced model Perimeter Protection based on Deep Learning algorithm
- Efficient H.265 pro+ compression technology
- Encoding ability up to 4K @ 8fps; 3K/5MP @12fps
- Up to 16 channels IP camera inputs, each channel up to 8MP
- Up to 24*1080P@30fps decoding ability
- 5 signals input adaptively (HDTVI/AHD/CVI/CVBS/IP)
- Support All channels Motion Detection technology



iDS-7216HQHI-M1/X(STD)
iDS-7216HQHI-M1/X(STD)/4A+4/1ALM

- 16 channels and 1 HDD 1U AcuSense DVR
- Support 4-ch Facial Recognition or 8-ch advanced model Perimeter Protection based on Deep Learning algorithm
- Support HDTVI Two-Way Audio technology
- Efficient H.265 pro+ compression technology
- Encoding ability up to 3K/5MP Lite@12fps
- Up to 24 channels IP camera inputs, each channel up to 6MP
- Up to 24*1080P@30fps decoding ability
- 5 signals input adaptively (HDTVI/AHD/CVI/CVBS/IP)
- Support All channels Motion Detection technology



iDS-7216HQHI-M2/X(STD)
iDS-7216HQHI-M2/X(STD)/4A+16/4ALM
iDS-7216HQHI-M2/X(STD)/16A+16/4ALM

- 16 channels and 2 HDD 1U AcuSense DVR
- Support 4-ch Facial Recognition or 8-ch advanced model Perimeter Protection based on Deep Learning algorithm
- Support HDTVI Two-Way Audio technology
- Efficient H.265 pro+ compression technology
- Encoding ability up to 3K/5MP Lite@12fps
- Up to 24 channels IP camera inputs, each channel up to 6MP
- Up to 24*1080P@30fps decoding ability
- 5 signals input adaptively (HDTVI/AHD/CVI/CVBS/IP)
- Support All channels Motion Detection technology



iDS-7216HUHI-M2/X(STD)
iDS-7216HUHI-M2/X(STD)/4A+16/4ALM
iDS-7216HUHI-M2/X(STD)/16A+16/4ALM

- 16 channels and 2 HDD 1U AcuSense DVR
- Support 4-ch Facial Recognition or 8-ch advanced model Perimeter Protection based on Deep Learning algorithm
- Efficient H.265 pro+ compression technology
- Encoding ability up to 4K @ 8fps; 3K/5MP @12fps
- Up to 32 channels IP camera inputs, each channel up to 8MP
- Up to 24*1080P@30fps decoding ability
- 5 signals input adaptively (HDTVI/AHD/CVI/CVBS/IP)
- Support All channels Motion Detection technology



iDS-7232HQHI-M2/X(STD)

- 32 channels and 2 HDD 1U AcuSense DVR
- Support 4-ch Facial Recognition or 8-ch advanced model Perimeter Protection based on Deep Learning algorithm
- Support HDTVI Two-Way Audio technology
- Efficient H.265 pro+ compression technology
- Encoding ability up to 3K/ 5MP Lite@12fps
- Up to 40 channels IP camera inputs, each channel up to 6MP
- Up to 24*1080P@30fps decoding ability
- 5 signals input adaptively (HDTVI/AHD/CVI/CVBS/IP)
- Support All channels Motion Detection technology

네트워크 & 전송

PoE Switch



HOT



DS-3E1506P-EI

- 4 × Gigabit PoE ports, 2 × Gigabit RJ45 ports
- Total PoE power budget 60W
- Support 802.1Q VLAN
- Support STP/RSTP loop prevention
- Support cable detection to locate failure



HOT



DS-3E1510P-EI

- 8 × Gigabit PoE ports, 2 × Gigabit RJ45 ports
- Total PoE power budget 110W
- Support 802.1Q VLAN
- Support STP/RSTP loop prevention
- Support cable detection to locate failure



DS-3E1518P-EI

- 16 × Gigabit PoE RJ45 ports, 1 × Gigabit RJ45 port, 1 × Gigabit fiber optical port
- Total PoE power budget 230W
- Unified cloud management for security systems
- Remote troubleshooting
- Visualized topology management



DS-3E1526P-EI

- 24 × Gigabit PoE RJ45 ports, 1 × Gigabit RJ45 port, 1 × Gigabit fiber optical port
- Total PoE power budget 370W
- Unified cloud management for security systems
- Remote troubleshooting
- Visualized topology management

Wireless Access Points & AC Router

NEW



DS-3WAP522-SI

- 1167 Mbps
- 1 GE RJ45
- Access (256/80)
- Spatial Stream: 2.4G 2x2 MIMO, 5G 2x2 MIMO



DS-3WAP622G-SI

- 1800 Mbps
- 1 GE RJ45
- Access (256/100)
- Spatial Stream: 2.4G 2x2 MIMO, 5G 2x2 MIMO



DS-3WAP622E-SI

- 3000 Mbps
- 1 2.5GE RJ45
- Access (256/100)
- Spatial Stream: 2.4G 2x2 MIMO, 5G 2x2 MIMO



DS-3WAP521-SI

- 1200 Mbps
- 2 GE RJ45
- Access (128/50)
- Spatial Stream: 2.4G 2x2 MIMO, 5G 2x2 MIMO



DS-3WAP621E-SI

- 1200 Mbps
- 2 GE RJ45
- Access (256/70)
- Spatial Stream: 2.4G 2x2 MIMO, 5G 2x2 MIMO



DS-3WG105G-SI

- 5 GE RJ45
- 100 Users
- 32-Aps
- AC 1000 Mbps



DS-3WG105GP-SI

- 4 GE PoE, 1 GE RJ45
- 100 Users
- 32-Aps
- AC 1000 Mbps
- PoE 54w



DS-3WG210GP-SI

- 8 GE PoE, 2 GE RJ45
- 200 Users
- 150-Aps
- AC 1000 Mbps
- PoE 75w



DS-3WG507G-SI

- 5 GE RJ45, 1 GE SFP, 1 GE Combo
- 500 Users
- 200-Aps
- AC 1000 Mbps
- Rack

Wireless Router



DS-3WR126C

- 1200 Mbps Wi-Fi 5
- 4 × RJ45, Gigabit auto-negotiation
- 4 × 5-dBi antennas
- Dual band - smart signal switching



DS-3WR4G12C

- AC1200 dual-band Wi-Fi
- 4G boosts faster speed
- Instantly access a mobile network with a SIM card



DS-3WR15X

- 1500 Mbps Wi-Fi 6
- 1 × Gigabit adaptive WAN port, 3 × Gigabit adaptive LAN ports
- Wired wireless dual Gigabit
- APP management
- Dual band in one and 5G first

SOHO Switch



DS-3E0105D-0

- 5 × 100 Mbps Ethernet ports
- Support ADI/ADIX
- Store-and-forward switching
- Support MAC address auto-learning and aging
- Plug & play, easy to use



DS-3E0508D-0

- 8 × Gigabit Ethernet ports
- Support ADI/ADIX
- Store-and-forward switching
- Support MAC address auto-learning and aging
- Plug & play, easy to use



DS-3E0508P-0

- Gigabit PoE and non-PoE ports for multiple use
- Plug & play with easy connection
- Built to last with a rugged metal case
- Desktop/Wall-mounted installation

비디오 인터콤

IP Kit

HOT



DS-KIS603-P(C)

Door Station: DS-KV6113-WPE1(C)

- 2 MP Camera, H:131°, V:78°
- One-press to call
- IR illumination, WDR
- IP65, PoE, Wi-Fi
- Built-in card reader module
- Convenient Hik-Connect App mobile control

Indoor Station: DS-KH6320-WTE1

- 7" touch screen, 1024 x 600
- 8-ch alarm inputs and 2-ch alarm outputs
- Wi-Fi
- Convenient Hik-Connect App mobile control
- Supports voice messages
- Elevator access control



DS-KIS604-S(C)

Door Station: DS-KV8113-WME1(C)

- 2 MP camera, H:124°, V:75°
- One-press to call
- IR illumination, WDR
- IP65&IK08, PoE
- Built-in card reader module
- Convenient Hik-Connect APP mobile control

Indoor Station: DS-KH6320-WTE1

- 7" touch screen, 1024 x 600
- 8-ch alarm inputs and 2-ch alarm outputs
- Wi-Fi
- Convenient Hik-Connect App mobile control
- Supports voice messages
- Elevator access control



DS-KIS606-P

Door Station: DS-KV6113-PE1(C)

- 2 MP camera, H:131°, V:78°
- One-press to call
- IR illumination, WDR
- IP65, PoE
- Built-in card reader module
- Convenient Hik-Connect App mobile control

Indoor Station: DS-KH6110-WE1

- 4.3" touch screen, 1024 x 600
- Wi-Fi
- Convenient Hik-Connect App mobile control
- Easy and quick set-up

4-Wire Kit



4-Wire HD
DS-KIS212

Door Station: DS-KB2412T-IM

- 2 MP camera, H:130°, V:70°
- HD TVI video quality
- One-press to call
- 4-wire plug & play analog interfaces

Indoor Station: DS-KH2230T

- 7" colorful TFT screen, 1024 x 600
- One-press to unlock the door
- 4-wire plug & play analog interfaces
- Supports monitoring door station and external analog camera



4-Wire Analog
DS-KIS203T

Door Station: DS-KB2421T-IM

- 2 MP camera
- Self-adaptive IR supplement
- One-press to call
- 4-wire plug & play analog interfaces
- IP65, anti-oxidant aluminum alloy

Indoor Station: DS-KH2220

- 7" colorful TFT screen, 1024 x 600
- One-press to unlock the door
- 4-wire plug & play analog interfaces
- Supports monitoring door station and external analog camera



4-Wire Hybrid
DS-KIS303-P

Door Station: DS-KB2421T-IM

- 2 MP camera
- Self-adaptive IR supplement
- One-press to call
- 4-wire plug & play analog interfaces
- IP65, Anti-oxidant aluminium alloy

Indoor Station: DS-KH6320-WTDE1

- 7" touch screen, 1024 x 600
- 2-ch alarm inputs and 2-ch alarm outputs
- TCP/IP, Wi-Fi
- Convenient Hik-Connect APP Mobile Control
- Support voice messages
- Elevator access control

출입 통제

MinMoe Face Recognition Terminals



DS-K1T320 Series

- New MinMoe value series face recognition terminal, more cost-effective
- 2.4-inch non-touch screen, equipped with physical button design
- Capacity: 500 faces, 1000 cards, 1000 fingerprints
- Support web configuration (PC and mobile)
- Support AP mode



DS-K1T321 Series

- New MinMoe value series face recognition terminal, more cost-effective
- 2.4-inch non-touch screen, equipped with physical button design
- Capacity: 500 faces, 3,000 cards, 3,000 fingerprints
- Support web configuration (PC and mobile)
- Support AP mode



DS-K1T343 Series

- 4.3 inch touch screen
- Capacity: 1,500 faces, 3,000 fingerprints, 3,000 cards



NEW

DS-K1T342-E1 Series

- 4.3 inch touch screen
- IP65
- Supports PoE to power the device and lock directly
- 1,500 faces 3,000 fingerprint 3,000 cards

Fingerprint and Card Terminals

DS-K1T805 Series



- IP65 & IK08 high protection levels
- Multiple authentication methods: fingerprint, card, PIN code, Bluetooth, etc.
- Easy to use: connect smart phone to Internet via AP mode directly for configuration/deployment
- Multiple applications: supports Hik-Connect, Mobile web, PC web, HikCentral Access Control

DS-K1T502 Series



- IP65 & IK09 high protection levels, zinc alloy material
- All-in-one: Manage access control, video intercoms, and video security with one device
- Multiple authentication methods: fingerprint, card, PIN code, etc.
- Easy to use: connect smart phone to Internet via AP mode directly for configuration/deployment
- Multiple applications: supports Hik-Connect, Mobile web, PC web, HikCentral Access Control

Speed Gates & Turnstiles



DS-K3G411X

Stainless Steel 304, outdoor

- Easy integration of any third-party access control system via relay input.
- Bidirectional (Entering/Exiting) lane
- LED indicates the entrance/exit and passing status.
- Fire alarm passing: When the fire alarm is triggered, the arm will be dropped automatically for emergency evacuation.
- Valid passing duration settings: System will cancel the passing permission if a person does not pass through the lane within the valid passing duration
- With key buttons to configure turnstile's functions and parameters offline



DS-K3B411B

Stainless steel 304, anti-tailgating

- 6 pairs of IR light detectors: Permissions validation and anti-tailgating
- LED light indicates passing direction
- The barrier will stop working for a period of time when detecting obstruction when open/close barrier
- Self-detection, Self-diagnostics, and automatic alarm
- System will cancel the passing permission if a person does not pass through the lane within the valid passing duration
- Door remaining open when fire alarm triggered: The barrier will open automatically when alarm is triggered.
- Barrier will automatically open when powering down

Metal Detector



- 12 Independent detection zones
- Support for two relay alarm outputs
- Adjustable zone sensitivity
- Support for automatic frequency selection
- Networking with the HikCentral Professional Platform



- 6 Independent detection zones
- Detect metal objects as small as coins
- Adjustable zone sensitivity
- Visual and auditory warnings

출입구 관리

ANPR Camera



DS-TCG406-E

- 4MP 1/1.8" progressive scan CMOS
- Embedded IR and white supplements lights
- Supports vehicle type/color/brand recognition
- Supports Wiegand, connectable with access control system

Barrier Gates



DS-TMG300-DR (3 m octagonal)

- Motor: DC brushless motor
- Boom Pole: 3 m octagonal pole, right direction
- Rising Speed & Falling Speed: 3 s
- Mean Cycles Between Failure (MCBF): 2,500,000
- Barrier Housing Material: Cold-rolled sheet
- IP54



DS-TMG300-DR (3.4-6m)

- Motor: DC brushless motor
- Boom Pole: 3.4 m-6 m telescopic pole, right direction
- Rising Speed&Falling Speed: 6 s
- Mean Cycles Between Failure (MCBF): 2,500,000
- Barrier Housing Material: Cold-rolled sheet
- IP54



DS-TMG300-DR/A/B (4m light)

- Motor: DC brushless motor
- Boom Pole: 4 m light pole, right direction
- Rising Speed&Falling Speed: 3 to 6 s
- Mean Cycles Between Failure (MCBF): 2,500,000
- Barrier Housing Material: Cold-rolled sheet
- Body Indicators
- IP54



DS-TMG301-DR (2+2m)

- Motor: DC brushless motor
- Barrier Boom: 2 m+2 m folding pole, right direction
- Rising Speed&Falling Speed: 3 to 6 s
- Mean Cycles Between Failure (MCBF): 2,500,000
- Barrier Housing Material: Cold-rolled sheet
- IP54

NEW

침입 알람

Wired Intrusion Alarm



HOT



AX HYBRID PRO Control Panel DS-PHA64-LP

- LAN, PSTN, Wi-Fi, GPRS or 3G/4G
- 8 on-board zones and 4 on-board outputs
- Compatible with wireless detectors via receiver, suitable for different scenarios
- Supports 24/7 monitoring with alarm response
- Speed-X technology, speed-x technology for extended communication distance
- kits available



Wired Internal 18 m PIR detector DS-PDP18-EG2

- Detection range: 18 m / 85.9°
- Selectable EOL resistors – tamper, fault and burglary alarm
- Wide voltage - 9 to 16 V wide voltage adaptation



HOT

BUS PIRCAM DS-PDPC12P-EG2

- Detection range: 12 m / 85.9°
- Up to 20 pictures, with 1920 * 1080p resolution
- 3D optics design for creep zone detection



NEW

Wired Double PIR Detector DS-PDP18-HM

- High/Low mount adjustment for flexible installation
- Tamper protection
- Adjustable sensitivity
- Digital temperature compensation



Wired Magnetic Contact DS-PD1-MC-MS

- Metal shell
- Metal surface installation
- 40 mm detection gap



Output Expander DS-PM1-04H-H

- 4 on-board outputs, supporting 100-240 V and up to 16A
- Supports cascade connection up to 5,400 m
- 1 power output for wired detectors



Input Expander DS-PM1-I802-H

- 8 on-board wired zones
- 2 on-board outputs
- Supports cascade connection up to 5,400 m
- 1 power output for wired detectors



HOT



Wired LCD Keypad DS-PK1-LRT-HWE/HWB

- LCD screen display
- Supports fire / panic / medical alarm keys
- Supports company name, phone number, time display, zone alarm details, etc.
- Supports 2 on-board alarm inputs and 1 on-board alarm output



Wired Sounder DS-PS1-R

- Up to 105 dB at 30 cm
- Red/ blue model for option

오디오

Network Audio

NEW



DS-QAZ1307G1T-E

- Max. Acoustic Pressure: 121 dB SPL
- Rated Power: 7W
- Frequency Response: 100Hz to 20kHz
- Support live/scheduled/alarm/emergency broadcast
- Support 2-way audio



DS-QAZ1110G1-B

- Max. Acoustic Pressure: 98dB SPL
- Rated Power: 10 W
- Frequency Response: 100 Hz to 20 kHz
- Support live/scheduled/alarm/emergency broadcast
- Support 2-way audio



Main Speaker



DS-QAZ1206G1-BE Supports up to 1 x 6 W sub speaker

- Max. Acoustic Pressure: 100 dB SPL
- Rated Power: 6 W
- Frequency Response: 300 Hz to 15 kHz
- Support live/scheduled/alarm/emergency broadcast



DS-QAE1A80G1-VB

- Support live/schedule broadcast
- Support alarm input/alarm schedule/ audio linkage
- Multiple audio input: MIC/USB/Bluetooth/RCA
- Support 2-zones volume adjustment
- Remote control, 2-zones 80W output
- Built-in eMMC

Analog Audio

NEW



DS-QAE0206G1-V

- Max. Acoustic Pressure: 98 dB SPL
- Rated Power: 6 W
- Frequency Response: 90 Hz to 20 kHz
- Support speaker spring terminal audio line input



DS-QAE0420G1-V

- Max. Acoustic Pressure: 96 dB SPL
- Rated Power: 20 W
- Frequency Response: 100 Hz to 20 kHz
- Support speaker spring terminal audio line input



DS-QAE0A60G1-VB

- Rated Power: 60 W
- Frequency Response: USB, Bluetooth: 20 Hz to 20 kHz; MIC, RCA Input: 20 Hz to 8 kHz
- Audio input: USB/Bluetooth/MIC/RCA
- Support two-zone volume adjustment
- Support multiple amplifiers cascaded via RCA cables

디스플레이

Monitors



DS-D5022FN00

- 21.5 inch, 1080 p
- Input: HDMI/VGA
- View angle: 178°/178°
- VESA bracket



DS-D5024FN10

- 23.8 inch, 1080 p
- Input: HDMI/VGA
- View angle: 178°/178°
- VESA bracket



DS-D5027FN

- 27 inch, 1080 p
- Input: HDMI/VGA
- View angle: 178°/178°
- VESA bracket



DS-D5022FC-C

- 21.5 inch, 1080 p
- Input: HDMI,VGA,BNC,speaker,USB
- View angle: 178°/178°
- VESA bracket
- 7 × 24 h



DS-D5024FC-C

- 23.8 inch, 1080 p
- Input: HDMI,VGA,BNC,speaker,USB
- View angle: 178°/178°
- VESA bracket
- 7 × 24 h



DS-D5032FC-A

- 31.5 inch, 1080 p
- Input: HDMI, VGA, BNC, speaker, USB
- View angle: 178°/178°
- VESA bracket
- 7 × 24 h

악세서리

UPS

NEW



DS-UPS600

- Capacity 600VA, 360W
- Wide input voltage range
- Built-in AVR
- Overload and short circuit protection
- Compact design



DS-UPS1000

- Capacity 1000VA, 600W
- Wide input voltage range
- Built-in AVR
- Overload and short circuit protection
- Compact design



DS-UPS2000

- Capacity 2000VA, 1200W
- LCD display
- Wide input voltage range
- Built-in AVR
- Overload and short circuit protection
- USB port for communication
- Compact design



DS-UPS3000

- Capacity 3000VA, 1800W
- LCD display
- Wide input voltage range
- Built-in AVR
- Overload and short circuit protection
- USB port for communication
- Compact design

Network Cable



CATE5E Cable DS-1LN5E-E/E

- UTP CAT 5E, 305 meters
- Core diameter: 0.45 mm
- Solid-Bare Copper (99.95%)
- Sheath color Black



CAT6 Cable with CPR Fca DS-1LN6U-SCO (Orange sheath) DS-1LN6U-G (grey sheath)

- UTP CAT6, 305 meters
- Core diameter: 0.55 mm
- Solid-Bare Copper (99.95%)



CAT6 Cable with UL CM CPR Eca DS-1LN6-UE-W (black/blue/white) DS-1LN6-UU (black/orange)

- UTP CAT6, 305 meters,
- Core diameter: 0.53 mm, 0.56 mm
- Solid-Bare Copper (99.95%)

소프트웨어



Hik-Partner Pro

Security Business Assistant. At Your Fingertips.

모바일 앱을 통한 원활한 딜리버리

- LAN에서 자동 장치 검색
- 자동화된 장치 설정
- 최종 사용자에게 간편한 핸드 오버

원격 유지보수로 효율성 향상

- 원격 파라미터 구성
- 원격 펌웨어 업그레이드
- 원격 암호 재설정

지속적인 수익을 위한 구독 서비스

- 헬스 모니터링
- 구독 관리



Hik-Connect

Unified Security, From Residence to Business

SMB 및 엔터프라이즈용 팀 모드


- 웹 포털 / 모바일 앱을 통해 액세스 가능
- 효율적인 멀티 사이트 관리
- 정확한 롤 기반 권한
- 서버리스 구축 및 확장성
- OpenAPI와의 원활한 통합

개인용 모드

- 탭 및 스와이프를 통한 용이한 컨트롤
- 원격 관리
- 적시적이고 정확한 알람
- 모든 데이터를 암호화하여 보안 강화

SMB(중소 규모 비즈니스)솔루션

주거 솔루션

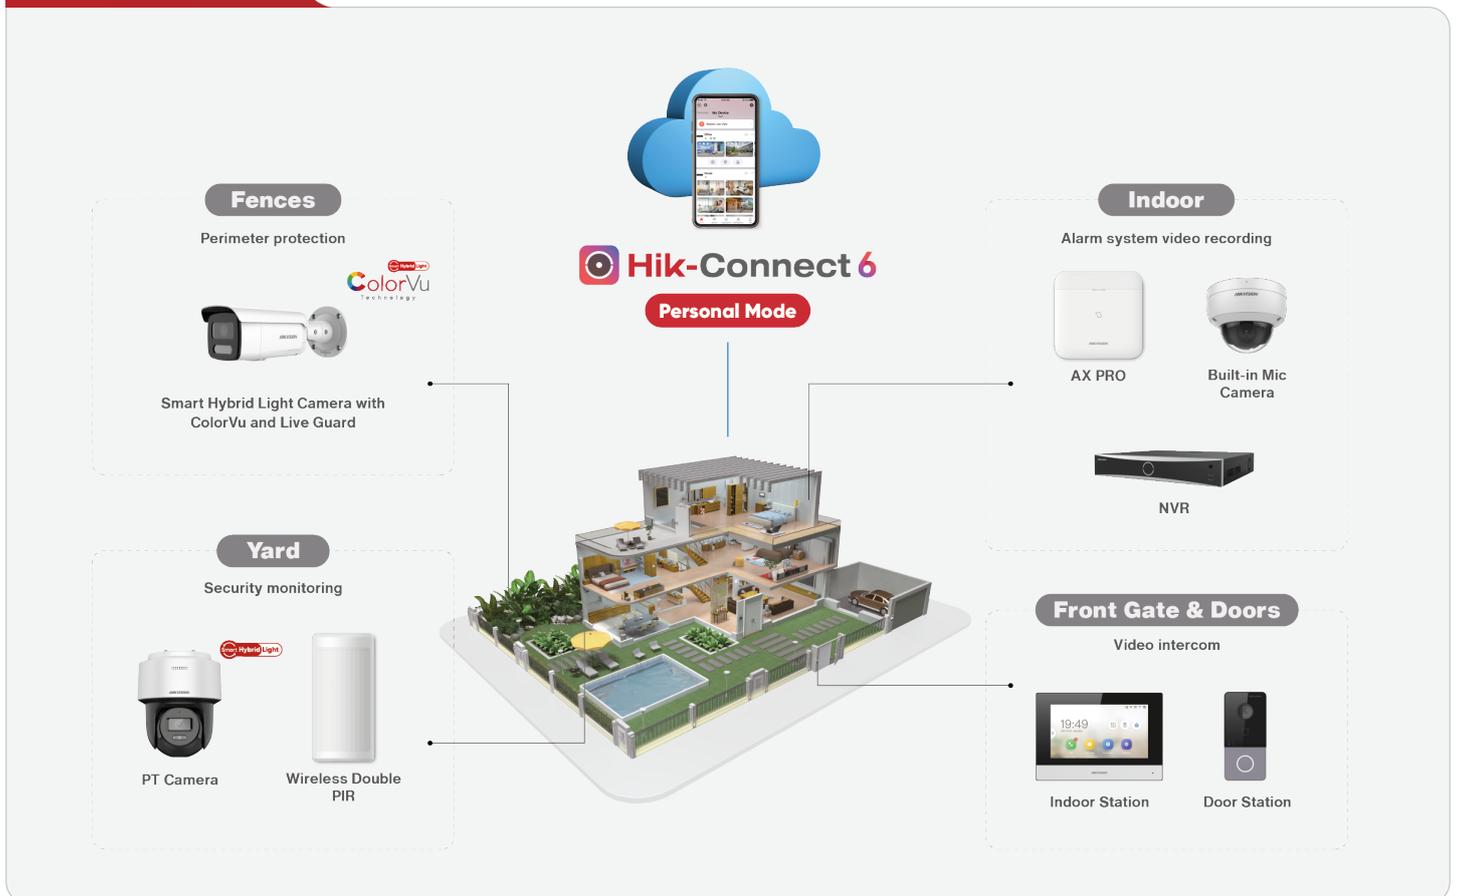

SMB(중소 규모 비즈니스)솔루션

매장 솔루션

Store Entrance



Camera with ColorVu

- 24/7 colorful imaging
- Visual & auditory warnings
- Three supplemental lighting modes



Team Mode



Smart Managed Switch

Shopping Area



Smart Hybrid Light PT Camera

- Motion Detection 2.0
- Two-way audio
- Three supplemental lighting modes



NVR

Store Entrance



AX PRO Alarm System

- Long-range signal transmission
- Wireless emergency button
- Remote configuration via app



Warehouse



MinMoe Facial Terminal

- 7-inch touch screen
- Deep learning face recognition
- Supports face, fingerprint & card recognition

오피스 솔루션

Reception



AX PRO Alarm System

- Easy installation via wireless transmission
- Video verification via IPC or PIRCAM



Team Mode



Smart Managed Switch

Lobby




Camera with ColorVu

- 24/7 colorful imaging
- Visual & auditory warnings

NVR

Office Door



MinMoe Facial Terminal

- Fast facial recognition <0.2 s
- Top security with face anti-spoofing



Vehicle Entrance




MinMoe Facial Terminal

- Flexible control with face, keyfob and QR code
- Two door control with a security unit expand

친환경 | Towards a Greener Footprint



친환경 제조

청정 에너지

2022년에만 하이키비전은 태양광, 풍력, 수력을 포함한 친환경 에너지 **32,852 MWh** 를 소비했고, 자체적으로 **4,508.3 MWh** 의 태양광 에너지를 생산했습니다.

친환경 재료

가능한 한 제품 제조에 친환경적인 재료를 사용합니다. 예를 들어, 우리는 게이트를 생산할 때 오염 물질 배출을 최소화하기 위해 무도장 공정을 사용합니다.

친환경 포장 패키지

제품 포장 내부의 완충재로 폴리에틸렌 대신 접힌 판지를 사용하는 것만으로도 연간 플라스틱 사용량을 **27.9** 톤을 줄일 수 있습니다.



친환경 운영

클라우드 기반 R&D 플랫폼

500개의 컴퓨팅 서비스 노드에 4,200개의 가상 머신을 제공하는 하이키비전의 R&D 클라우드 플랫폼은 연간 전기 소비량을 약 **5,000 MWh** 탄소 배출량을 약 **4,000** 톤을 줄입니다.

더욱 스마트해진 에너지 소비


AI 기반 센서는 회의실에 사람이 있는지 감지하고 회의실이 비어 있으면 조명과 에어컨을 자동으로 끕니다.

지속 가능한 물 사용

우리는 빗물 유출량의 총량을 통제하고 사무 단지에서 빗물이 재활용 및 재사용되는 방식을 개선합니다.

'그린 오피스' 활동

우리는 종이 없는 사무실에 대한 철학을 구현하고 있습니다. 가능한 경우 회의는 온라인으로 진행하며 인쇄 자료는 이에 상응하는 디지털 자료로 대체됩니다. 또한 저탄소 출장을 장려합니다.

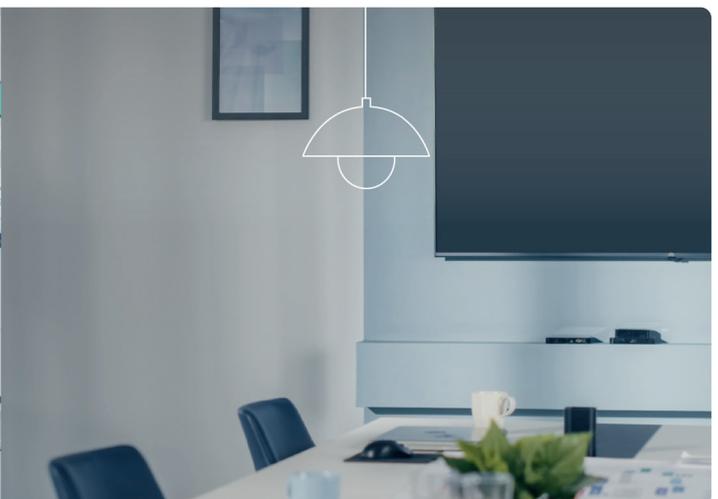

유통 제품 카탈로그

HOT-SELLING PRODUCTS



하이크비전코리아

경기도 성남시 분당구 판교역로 192번길 14-1 판교에미지빌딩 5층

TEL: 1661-8138 | FAX: 031-731-8812

www.hikvision.com/korean | 문의: sales.korea@hikvision.com



HIKVISION[®]